




SPLENOR

IMPROVISING AT EVERY STEP

COMMERCIAL INDUCTION SOLUTIONS



COMMERCIAL INDUCTION SOLUTIONS

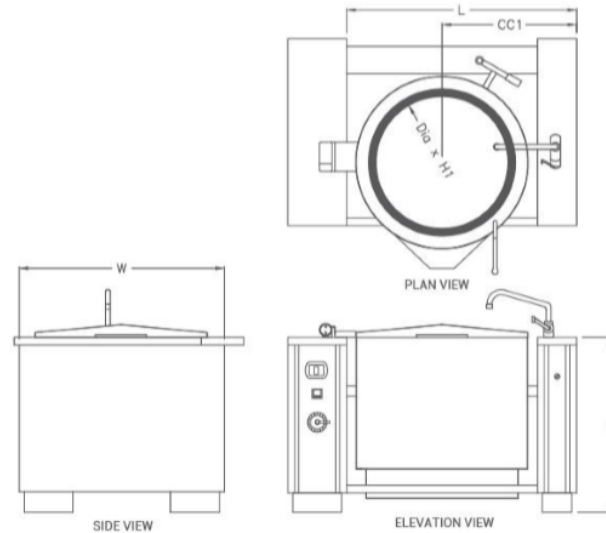

INDUCTION TILTING BOILING PAN

- STAINLESS STEEL 304 GRADE CONSTRUCTION.
- EIGHT STAGES POWER CONTROL.
- WATER PROOF CONSTRUCTION.
- WATER CONTROL VALVE.
- ACCURACY IN TEMPERATURE CONTROL.



**DIGITAL
TEMPERATURE
CONTROLLER**



POWER CONTROLLER

TECHNICAL SHEET

| MODEL | CAPACITY | DIMENSIONS | POWER | FREQUENCY | VOLTS | CONTROLLER | CONSTRUCTION |
|-------------|----------|--------------------|-------|-----------|-------|------------|--------------|
| SPL-TB-100i | 100 | 1350 x 900 x 1000 | 10 Kw | 50-60Hz | 440 V | DIGITAL | SS 430/304 |
| SPL-TB-150i | 150 | 1350 x 1000 x 1000 | 15 Kw | 50-60Hz | 440 V | DIGITAL | SS 430/304 |
| SPL-TB-200i | 200 | 1500 x 1000 x 1000 | 20 Kw | 50-60Hz | 440 V | DIGITAL | SS 430/304 |
| SPL-TB-300i | 300 | 1650 x 1100 x 1000 | 25 Kw | 50-60Hz | 440 V | DIGITAL | SS 430/304 |
| SPL-TB-400i | 400 | 1800 x 1200 x 1000 | 35 Kw | 50-60Hz | 440 V | DIGITAL | SS 430/304 |



TILTING BRATT PAN

- STAINLESS STEEL 430/304 GRADE CONSTRUCTION.
- EIGHT STAGES POWER CONTROL.
- WATER PROOF CONSTRUCTION.
- WATER CONTROL VALVE.
- ACCURACY IN TEMPERATURE CONTROL.




DIGITAL
TEMPERATURE
CONTROLLER



POWER CONTROLLER

TECHNICAL SHEET

| MODEL | CAPACITY | DIMENSIONS | POWER | FREQUENCY | VOLTS | CONSTRUCTION |
|--------------|----------|--------------------|-------|-----------|-------|--------------|
| SPL-TBP-100i | 100 | 1200 x 900 x 1000 | 10 Kw | 50-60Hz | 480 V | SS 430/304 |
| SPL-TBP-150i | 150 | 1350 x 1000 x 1000 | 15 Kw | 50-60Hz | 440 V | SS 430/304 |
| SPL-TBP-200i | 200 | 1350 x 1000 x 1000 | 20 Kw | 50-60Hz | 440 V | SS 430/304 |
| SPL-TBP-300i | 300 | 1650 x 1000 x 1000 | 30 Kw | 50-60Hz | 440 V | SS 430/304 |

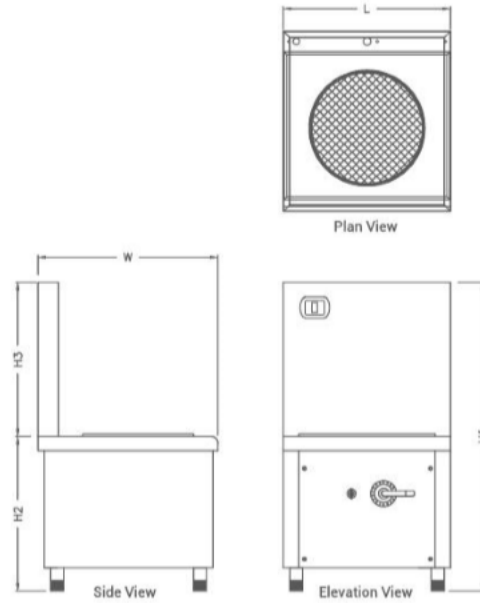

INDUCTION STOCK POT

- STAINLESS STEEL 304 GRADE CONSTRUCTION.
- EIGHT STAGES POWER CONTROL.
- WATER PROOF CONSTRUCTION.
- WATER CONTROL VALVE.
- ACCURACY IN TEMPERATURE CONTROL.



DIGITAL
TEMPERATURE
CONTROLLER



POWER CONTROLLER



*Auto-Sensing Pan with fast
heat cooking.*

| MODEL | GLASS SIZE | DIMENSIONS | POWER | VOLTS | FREQUENCY | CONSTRUCTION |
|-----------|------------|-----------------------|-------|-------|-----------|--------------|
| SPL-STP08 | 430 MM | 650 X 700 X 600+600 | 8 Kw | 440 V | 50-60Hz | SS 430/304 |
| SPL-STP12 | 430 MM | 700 X 700 X 600 + 600 | 12 Kw | 440 V | 50-60Hz | SS 430/304 |

SINGLE CHINESE RANGE

- STAINLESS STEEL 304 GRADE CONSTRUCTION.
- EIGHT STAGES OF POWER CONTROL.
- WATER PROOF CONSTRUCTION.
- ACCURACY IN TEMPERATURE CONTROL.
- MICRO CRYSTAL GLASS.



**DIGITAL
TEMPERATURE
CONTROLLER**



POWER CONTROLLER




*Auto-Sensing Pan with fast
heat cooking.*



Two Ears Iron Wok



| MODEL | GLASS MATERIAL | DIMENSIONS | POWER | VOLTS | FREQUENCY | CONSTRUCTION |
|-----------|---------------------|-----------------|-------|-------|-----------|--------------|
| SPL-CW-8 | MICRO CRYSTAL GLASS | 750x750x800+400 | 8 Kw | 440 V | 50- 60 Hz | SS 430/304 |
| SPL-CW-12 | MICRO CRYSTAL GLASS | 750x750x800+400 | 12 Kw | 440 V | 50- 60 Hz | SS 430/304 |

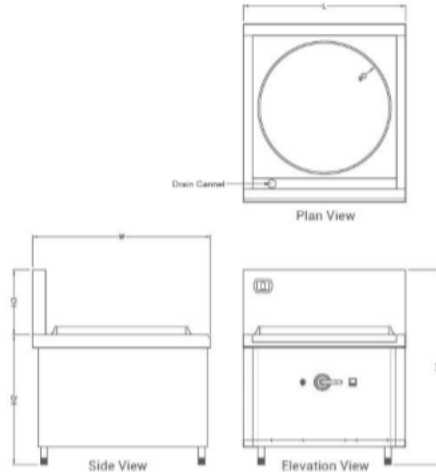

INDUCTION ROUND FRYING PAN / KADHAI FRYER

- **STAINLESS STEEL 304 GRADE CONSTRUCTION.**
- **EIGHT STAGES OF POWER CONTROL.**
- **WATER PROOF CONSTRUCTION.**
- **DEEP PRESSED FRYING PAN.**
- **ACCURACY IN TEMPERATURE CONTROL.**



**DIGITAL
TEMPERATURE
CONTROLLER**




POWER SWITCH



Over Temperature Protection

| MODEL | PAN DIA | DIMENSIONS (MM) | CAPACITY(Ltrs) | POWER | VOLTS | FREQUENCY | CONSTRUCTION |
|-------------|---------|-------------------------|----------------|-------|-------|-----------|--------------|
| SPL-FP500i | 500 MM | 750 x 850 x 850 + 350 | 18 | 08 Kw | 440 V | 50-60Hz | SS 430/304 |
| SPL-FP600i | 600 MM | 800 X 900 X 850 + 350 | 25 | 12 Kw | 440 V | 50-60Hz | SS 430/304 |
| SPL-FP700i | 700 MM | 900 X 1100 X 850 + 350 | 50 | 15 Kw | 440 V | 50-60Hz | SS 430/304 |
| SPL-FP1000i | 900 MM | 1100 x 1200 x 850 + 350 | 90 | 25 Kw | 440 V | 50-60Hz | SS 430/304 |
| SPL-FP1200i | 1000 MM | 1200 x 1200 x 850 + 350 | 120 | 30 Kw | 440 V | 50-60Hz | SS 430/304 |

TABLE TOP INDUCTION WOK

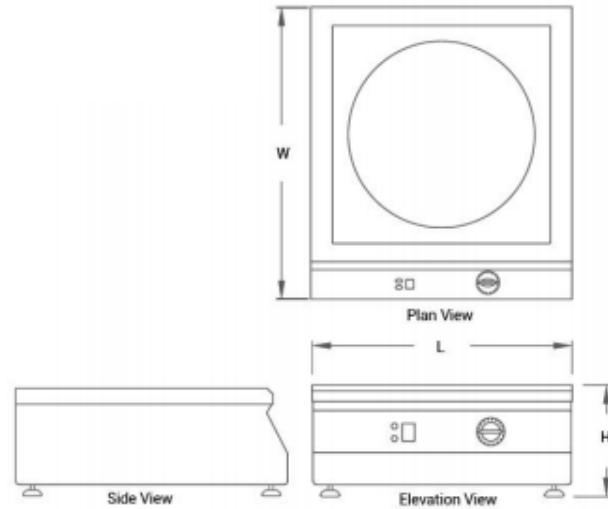

- **STAINLESS STEEL 304 GRADE CONSTRUCTION.**
- **EIGHT STAGES OF POWER CONTROL.**
- **HIGH STRENGTH MICRO CRYSTAL GLASS.**



Over Temperature Protection



Auto-Sensing Pan with fast heat cooking.

| MODEL | GLASS MATERIAL | GLASS /WOK PAN DIA | DIMENSIONS (MM) | POWER | VOLTS | FREQUENCY | CONSTRUCTION |
|-----------|---------------------|--------------------|-----------------|-------|-------|-----------|--------------|
| SPL-TIW-5 | MICRO CRYSTAL GLASS | 300/400 MM | 450 X 450 X 250 | 5 Kw | 220 V | 50-60 Hz | SS 430/304 |
| SPL-TIW-8 | MICRO CRYSTAL GLASS | 420/500 MM | 500 X 550 X 300 | 8 Kw | 380 V | 50-60 Hz | SS 430/304 |



TWIN BASKET DEEP FAT FRYER

- STAINLESS STEEL 304 GRADE CONSTRUCTION.
- EIGHT STAGES OF POWER CONTROL.
- MESH BASKET WITH HANDLE.
- TEMPERATURE CONTROLLER.






DIGITAL
TEMPERATURE
CONTROLLER



POWER CONTROLELR

| MODEL | CONTROLLER | DIMENSIONS (MM) | POWER | VOLTS | FREQUENCY | CONSTRUCTION |
|---------|------------|-----------------------|-------|-------|-----------|--------------|
| SPL-DFF | DIGITAL | 450 X 800 X 850 + 100 | 8 Kw | 420 V | 50-60 Hz | SS 430/304 |

COMMERCIAL INDUCTION SOLUTIONS

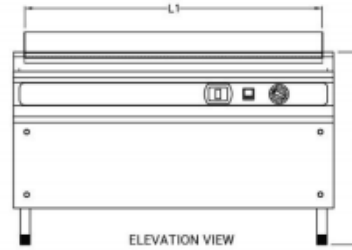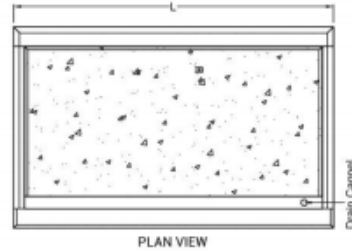


INDUCTION HOT PLATE

- STAINLESS STEEL 304 GRADE CONSTRUCTION.
- EIGHT STAGES OF POWER CONTROL.
- ACCURATE TEMPERATURE CONTROL.
- TEMPERATURE CONTROLLER.
- 20MM THICK MS PLATE SURFACE FINISH.



| MODEL | POWER CONTROL | DIMENSIONS | WORKING PLATE SIZE | POWER | VOLTS | FREQUENCY | CONSTRUCTION |
|------------|---------------|------------------------|--------------------|-------|-------|------------|--------------|
| SPL- HP 12 | 8 STAGES | 900 X 800 X 850 + 150 | 750 X 650 | 12Kw | 440 V | 50 – 60 Hz | SS 430/304 |
| SPL-HP 15 | 8 STAGES | 1200 X 800 X 850 + 150 | 900 X 650 | 15Kw | 440 V | 50 – 60 Hz | SS 430/304 |
| SPL-HP 20 | 8 STAGES | 1500 X 800 X 850 + 150 | 1200 X 650 | 20Kw | 440 V | 50 – 60 Hz | SS 430/304 |
| SPL-HP 24 | 8 STAGES | 1800 X 800 X 850 + 150 | 1500 X 650 | 24Kw | 440 V | 50 – 60 Hz | SS 430/304 |

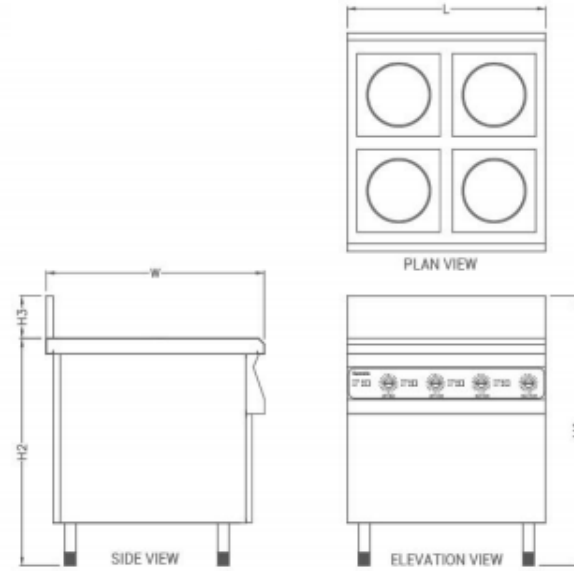

INDUCTION FOUR BURNER ROUND/SQUARE

- STAINLESS STEEL 304 GRADE CONSTRUCTION.
- EIGHT STAGES OF POWER CONTROL.
- ACCURATE TEMPERATURE CONTROL.
- TEMPERATURE CONTROLLER.
- HIGH STRENGTH MICRO CRYSTAL GLASS.



DIGITAL
TEMPERATURE
CONTROLLER





POWER CONTROLLER



Auto-Sensing Pan with fast heat cooking.

| MODEL | GLASS MATERIAL | DIMENSIONS | POWER | TOTAL KW | VOLTS | FREQUENCY | CONSTRUCTION |
|---------|---------------------|-----------------------|-------------|----------|-------|-----------|--------------|
| SPL-IB4 | MICRO CRYSTAL GLASS | 750 X 750 X 850 + 150 | 3.5 Kw Each | 14 | 440 V | 50- 60 Hz | SS 430/304 |

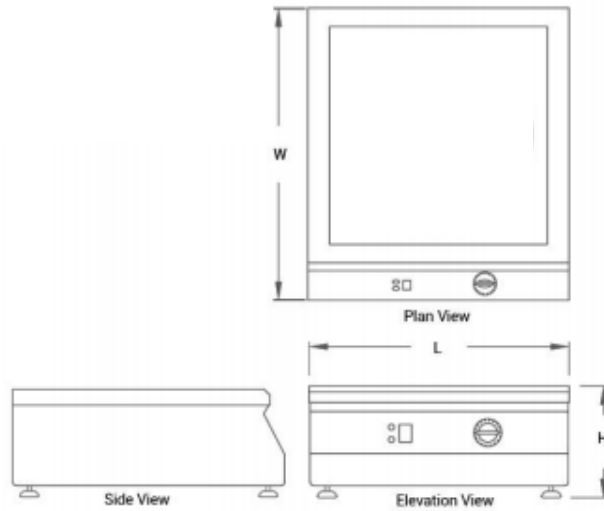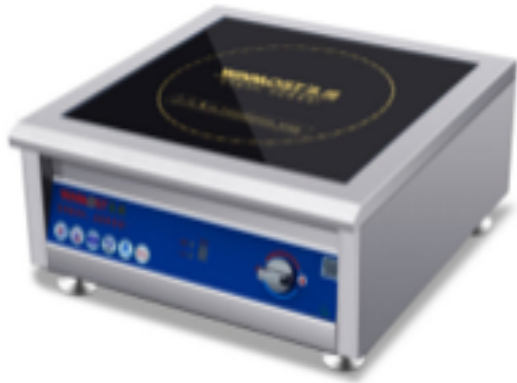

INDUCTION TABLE TOP

- **STAINLESS STEEL 304 GRADE CONSTRUCTION.**
- **EIGHT STAGES OF POWER CONTROL.**
- **HIGH STRENGTH MICRO CRYSTAL GLASS.**



**DIGITAL
TEMPERATURE
CONTROLLER**





POWER CONTROLELR



*Auto-Sensing Pan with fast
heat cooking.*

| MODEL | GLASS MATERIAL | DIMENSIONS | POWER | VOLTS | FREQUENCY | CONSTRUCTION |
|-----------|---------------------|-----------------|-------|-------|-----------|--------------|
| SPL-ITP-5 | MICRO CRYSTAL GLASS | 425 X 425 X 200 | 5 Kw | 220 V | 50- 60 Hz | SS 430/304 |
| SPL-ITP-8 | MICRO CRYSTAL GLASS | 520 X 525 X 250 | 8 Kw | 380 V | 50- 60 Hz | SS 430/304 |

COMMERCIAL INDUCTION SOLUTIONS

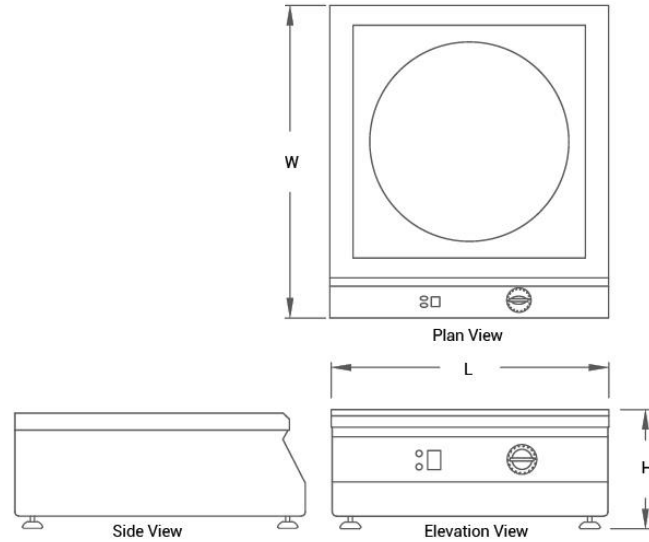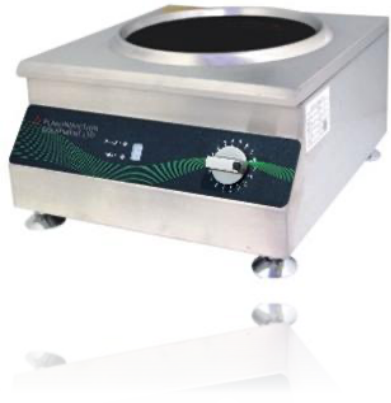

INDUCTION TABLE TOP

- STAINLESS STEEL 304 GRADE CONSTRUCTION.
- EIGHT STAGES OF POWER CONTROL.
- HIGH STRENGTH MICRO CRYSTAL GLASS.



**DIGITAL
TEMPERATURE
CONTROLLER**



POWER CONTROLLER



*Auto-Sensing Pan with fast
heat cooking.*

| MODEL | GLASS MATERIAL | DIMENSIONS | POWER | VOLTS | FREQUENCY | CONSTRUCTION |
|----------|---------------------|----------------|--------|-------|-----------|--------------|
| SPL-PTTI | MICRO CRYSTAL GLASS | 420X 480 X 180 | 3.5 Kw | 220 V | 50- 60 Hz | SS 430/304 |
| SPL-WTTI | MICRO CRYSTAL GLASS | 420X 480 X 180 | 3.5 Kw | 220 V | 50- 60 Hz | SS 430/304 |